
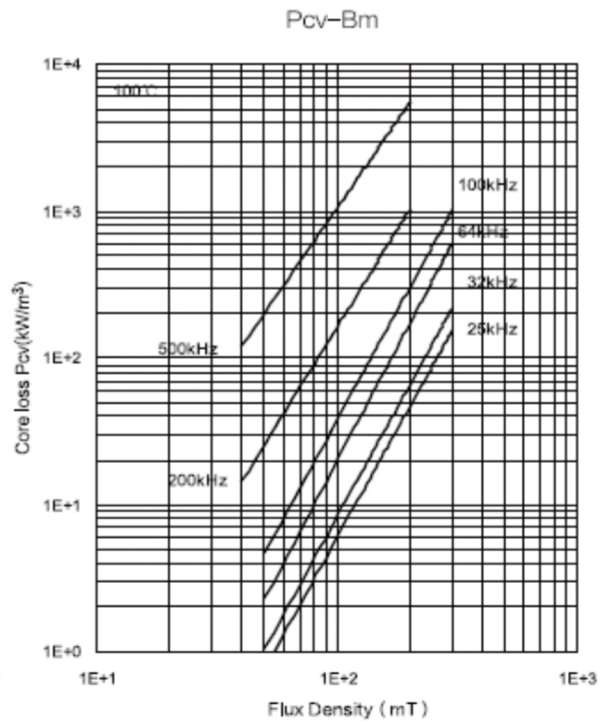
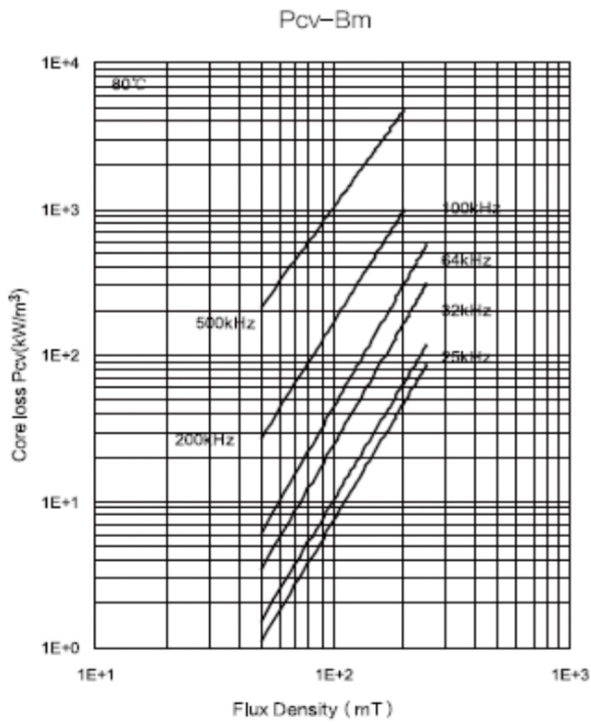
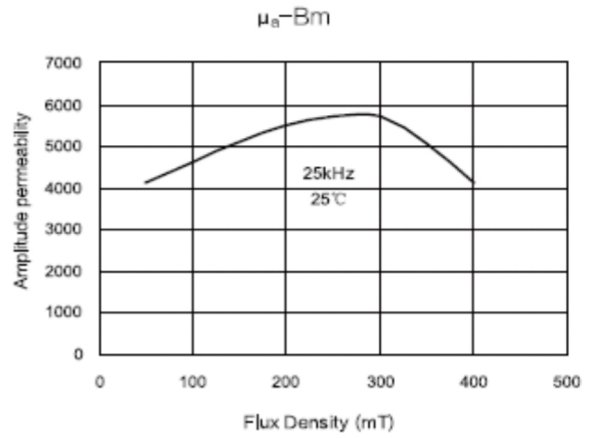





材料/Material:SP4A

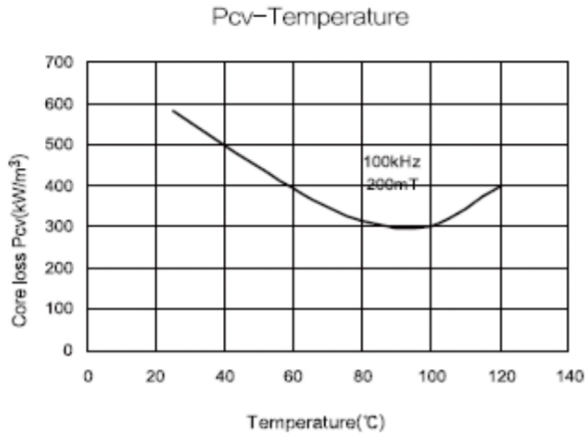

材料/Material: SP4A

特点/Features:

1. 主要应用于中频段(小于300kHz)/Mostly Used at Middle Frequency (Less than 300kHz)
2. 低磁芯损耗,高饱和磁感应强度/Low Core Loss and High Saturation Flux Density
3. 损耗最低的温度点约在90℃/The Temperature Point of the Lowest Core Loss is 90℃

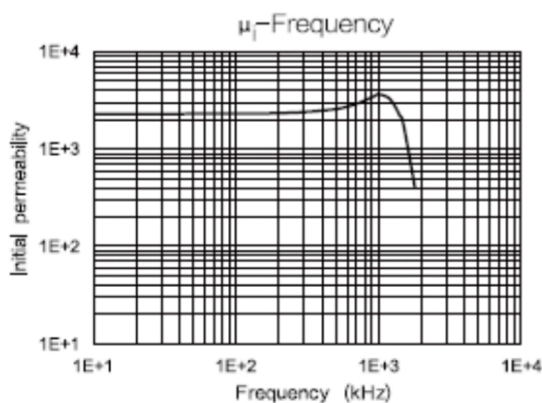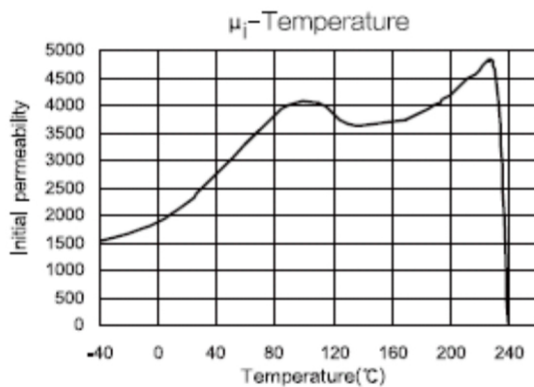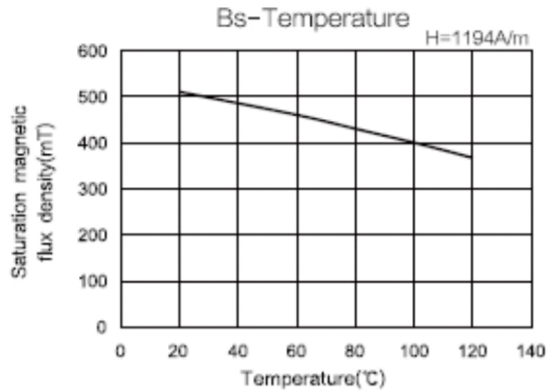

Initial permeability	$\mu_i$	25°C	2400±25%	
Saturation magnetic flux density	Bs(mT)	25°C	510	
		100°C	390	
Remanence	Br(mT)	25°C	110	
		100°C	60	
Coercivity	Hc(A/m)	25°C	13	
		100°C	6,5	
Core loss	Pcv(kW/m³)	25°C	600	
		100kHz 200mT	100°C	300
			120°C	400
Curie temperature	Tc(°C)		≥215	
Electrical resistivity	$\rho(\Omega\cdot m)$		6,5	
Density	d(kg/m³)		4,8×10³	

Test core: Toroid(mm)

OD: 25

ID: 15

H: 7,5

