
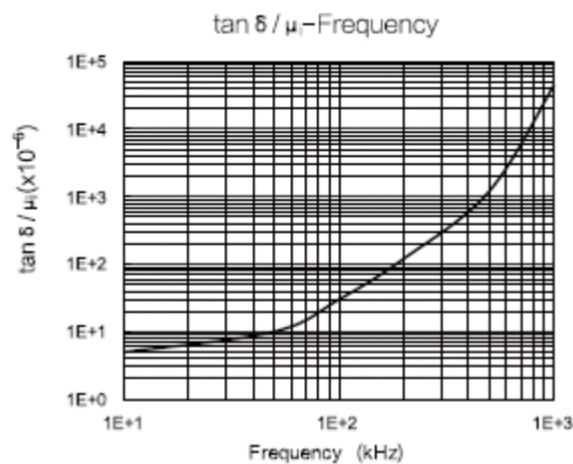
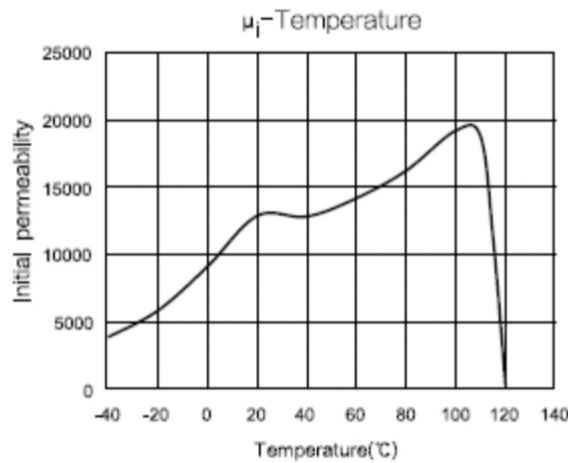


材料/Material:SL13

特点/Features:


1.高磁导率(约13000)/High Initial Permeability(about 13000)

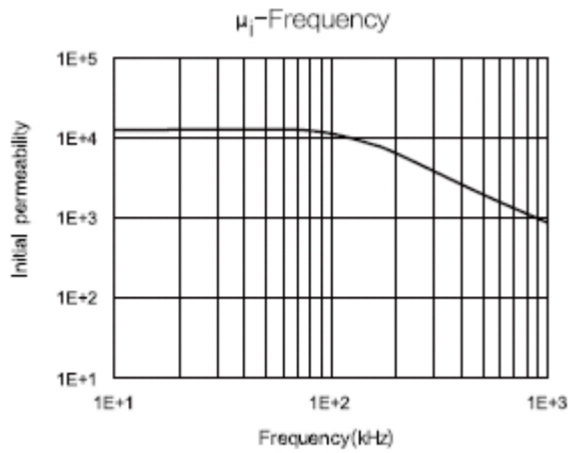

Initial permeability	$\mu_i$	25°C	13000±30%
Saturation magnetic flux density	$B_s$ (mT)	25°C	360
Remanence	$B_r$ (mT)	25°C	100
Coercivity	$H_c$ (A/m)	25°C	4,4
Relative loss factor	$\tan \delta / \mu_i$ ( $x10^{-6}$ )	25°C 10kHz	<7
Relative temperature coefficient	$\alpha_{\mu ir}$ ( $x10^{-6}/^{\circ}C$ )	20°C~60°C	-0.5~3.0
Disaccommodation factor	$D_F$ ( $x10^{-6}$ )	1~10min	<2.0
Curie temperature	$T_c$ (°C)		≥115
Electrical resistivity	$\rho$ ( $\Omega \cdot m$ )		0,15
Density	$d$ ( $kg/m^3$ )		$4.95 \times 10^3$

Test core:Toroid(mm)

OD: 18  
ID: 8  
H: 5

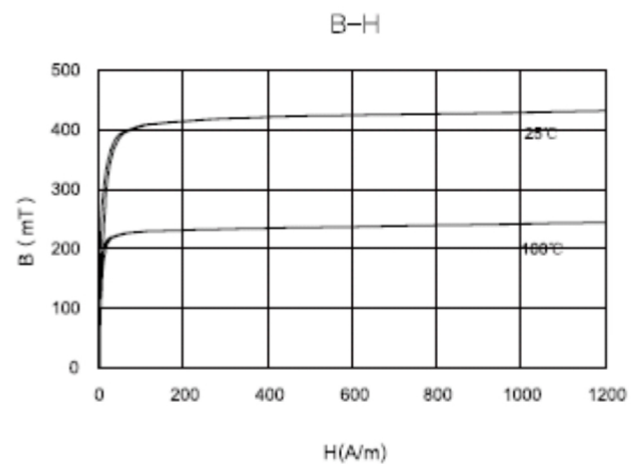

材料/Material:SL13

